

# **MULTISWITCH 9 IN, 8 OUT**




### **TMS 9X8P**

Article number 100300348

**PRODUCT CATEGORY: 80 SAT** 

STATUS: AVAILABLE

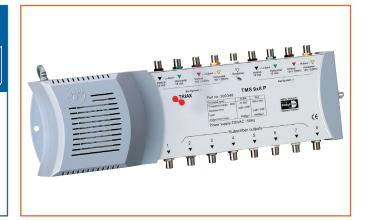

#### **Product**

MULTISWITCH 9 IN, 8 OUT TMS 9X8P

TMS 9XP multiswitches offer a flexible and cost efficient system for providing two position satellite distribution in small and medium sized networks. The systems uniqueness in design and performance makes community networks attractive even in buildings with only 2 or 3 households. 8 satellite polarities and 1 terrestrial input, 8 combined subscriber outputs. Low power consumption. The TMP 9xP has an intergrated power supply with grounding posibility.

### **Properties**









# Certificates

Included

N/A

**Tools** 

N/A

#### Instruction video

N/A

#### Instruction card

www.hirschmann-multimedia.net/installation/installatie-schema

Productsheet TMS 9X8P

Article number 100300348

Version 11.2014-1.0

Page 1 / 2

# Mechanical **Specifications**

Dimensions hxwxd 103 x 71 x 359 mm

Weight 1.6 kg

Color White

### **PRODUCTSHEET**


**TMS 9X8P** 

**MULTISWITCH** 9 IN, 8 OUT

## **Specifications**

Number of inputs 8 SAT, 1 TER Subscriber outputs Connectors F female Frequency range SAT 950-2150 MHz Frequency range TER 47-862 MHz Gain SAT 2 dB Gain TER -2 dB Isolation TER to SAT 28 dB Isolation SAT to TER 30 dB Isolation cross polarisation H/V 28 dB Isolation out - out TER 26 dB Isolation out - out SAT 30 dB **Return loss SAT inputs** 14 dB Return loss SAT outputs 7 dB Return loss TER inputs 11 dB 8 dB Return loss TER outputs Max. output level SAT (IMD-35 dB) 100 dBμV Max. output level TER (IMD-65 dB) 85 dBµV Impedance input/output 75 Ohm 13 V - 18 V Switching 13 V/22 kHz -18 V/22 kHz

(via DC plug or trunk) Power supply Included LNB power supply max. 1000 mA Colourcoding of IF and TER inputs Yes

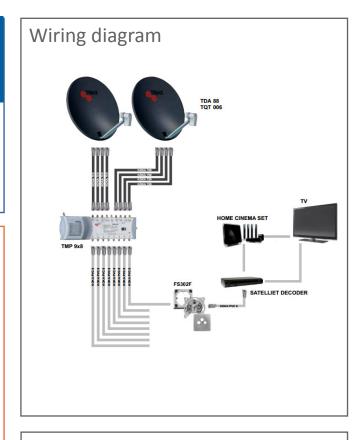

#### Related product - KOKA 799 BLACK

Article number 198799102



#### Related product - TMS 9 AMP

Article number 100300365



#### Related product - 2600S LINE AMP

Article number 100300401



#### Contact

Supply voltage

Temperature range



Pampuslaan 170 1382 JS WEESP



info@hirschmann.nl



NL 31 (0)294 46 25 55 BE 32 (0)2 46 13 095



www.linkedin.com/company/hirschmann-multimedia-b.v.



www.facebook.com/hirschmann.multimedia

www.youtube.com/HirschmannMultimedia

Productsheet TMS 9X8P

Article number 100300348

DiSEqC 2.0

0- +55 °C

15 VDC (± 0.5)

#### Hirschmann Multimedia B.V.

Hirschmann Multimedia B.V. is an international knowledge company and manufacturer, located in Weesp -The Netherlands. Hirschmann Multimedia focusses on leading the market by being innovative, flexible and renewing.

#### Hirschmann Multimedia Products (HMP):

Serving the retail and installer market, Hirschmann Multimedia Products is expanding from The Netherlands and Belgium towards 16 other European countries as of 2014. Through a qualified and selected dealer and installer network, HMP provides in products for COAX, IP and satellite systems.

Version 11.2014-1.0

Page 2 / 2

© Copyright 2014 Hirschmann Multimedia B.V. All rights reserved. This document is for informational purposes only. Specifications and features can be subject to change without notice. Company name Hirschmann Multimedia B.V. and trade marks are registered in The Netherlands and Europe. For general terms and conditions of sale and delivery: www.hirschmann-multimedia.net.